

SHERMAN Touchless

A POWERFUL PARTNERSHIP



The **Sherman Touchless** pushbutton is the perfect touch-free solution to the commonly touched elevator surface. Simply hold finger over button for sensor activation. Manual button function remains to meet code requirements.

- ✓ Dual Technology: Electromechanical contact (activated by push) and proximity sensor
- ✓ Eliminates transferring germs through touched surfaces
- ✓ Perfect retrofit product for DMG/MAD buttons
- ✓ LED Illumination available in White



General Details

Mounting: Frontal, by jam-nut

Body: AISI 303 turned stainless steel button

Component Ordering: Complete Assembly, BSLVF34MW.00

Contacts: mechanical mode: 1 contact 30V, 60mA
touchless mode: opto relay 30V, 60mA

Wiring: screw terminals

Voltage: 24V DC, stand-by 15mA, max 50mA

Illumination: white


Stroke: 0.040"

Avg. Life: 1,500,000 activations


Degree of protection: IP44, IK07

Cleaning: Wipe down with mild soap and a damp cloth


Physical Characteristics

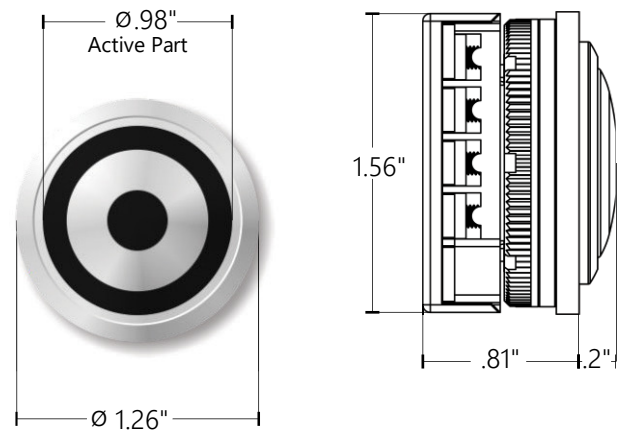


Mounting Requirements

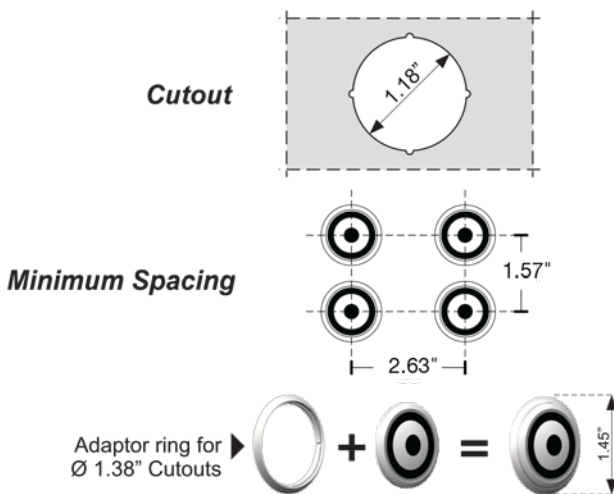

Contact Block

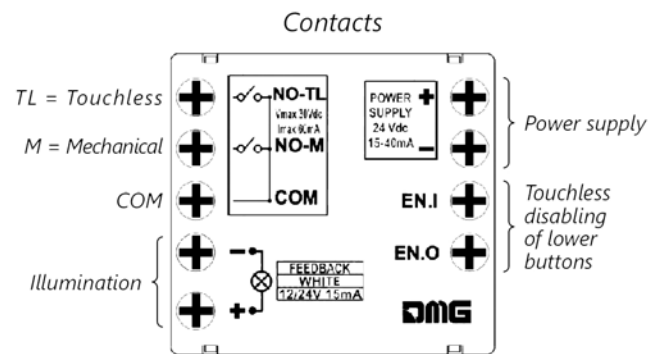

Wiring Diagram

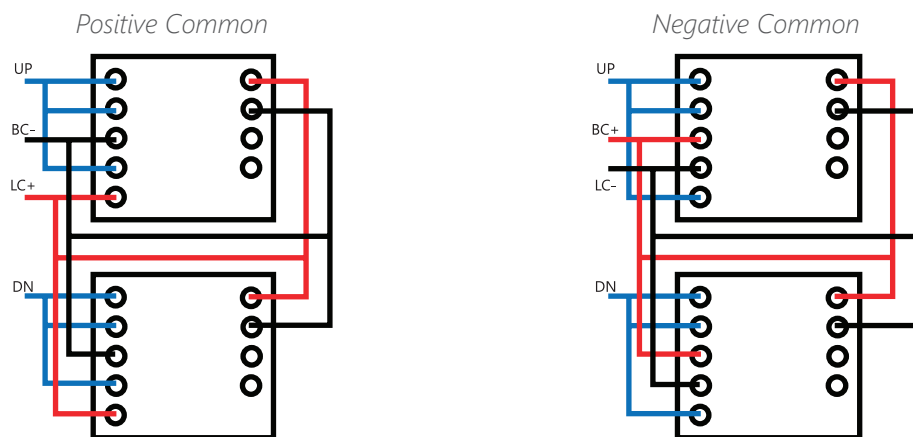

This publication is for general informational purposes only. Product design is subject to change without notice. Actual product colors and finishes may vary.

Copyright © 2020 MAD Elevator Inc.

vantageelevation.com
(347) 226-4558
sales@vantageelevation.com