


GT11 BS

Geared Traction Machine

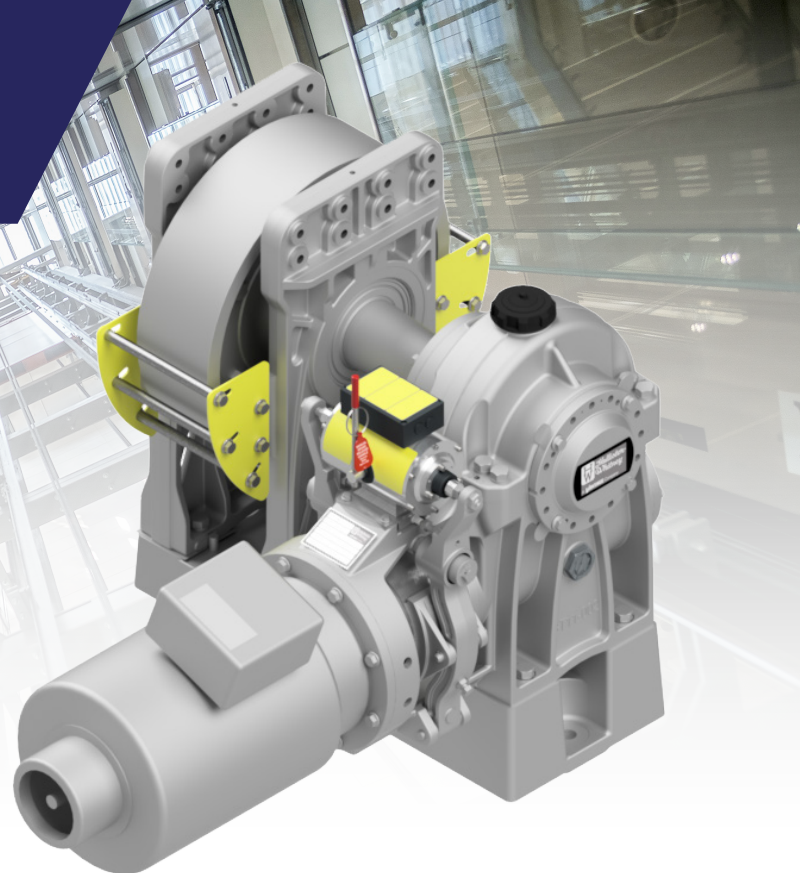

POWERFUL, COMPACT & EASY TO INSTALL

**Ideal for low to mid-rise
traction elevator applications
for new construction and
modernization projects**

BENEFITS

- Easy disassembly and reassembly
- Allows up to 8" hoistway wall
- Simple motor coupling and brake adjustments
- Rope gripper mounting
- Easy installation, adjustments and preventative maintenance
- Flange mount motors dismount easily and simplify costly motor alignment

STANDARD FEATURES

- Approximate weight: Machine and base: 2125#
- Available with either a 22-in., 26-in., or 30-in. sheave
- Standard NEMA C-face motor interface
- Designed for machine room applications with VVVF A/C controls
- Operates at speeds of 100 to 500 ft/min (0.51 to 2.54 m/sec) and capacities of 1,000 to 3,000 lbs (454 to 1,361 kg) with 1:1 roping and 1,000 to 6,000 lbs (454 to 2,722 kg) with 2:1 roping
- Smaller universal-fabricated ductile iron base
- LH and RH configurations
- Quiet braking solenoid
- Sealed bearings for reduced maintenance
- Enhanced bronze gear material
- Width*: 36.6"/930mm
- Height*: 39.1"/993mm
- Length: 62.1"/1577mm
- Maximum sheave shaft load 17,000 lbs

*Height and width assumes 30-in sheave and 326TC motor

OPTIONAL FEATURES

- Traction wheel rope retainer
- Machine guarding with rope guard
- Overhead applications
- Overhead deflector applications

WHEN ORDERING, PLEASE SPECIFY

- Operating capacity and speed
- Sheave diameter
- Power supply
- 1:1 or 2:1 roping
- Left or right hand
- Number, size and pitch of hoist rope
- Motors: 284TC - 300#, 286TC - 325#, 324TC - 400#, 326TC - 450#

HORSEPOWER SELECTION CHART / 1:1 ROPING, COUNTERWEIGHT 40% CAPACITY

CAR CAPACITY	SUGGESTED HORSEPOWER AT SPEEDS OF:									
	100 F/M (0.51 M/S)	125 F/M (0.64 M/S)	150 F/M (0.76 M/S)	200 F/M (1.02 M/S)	250 F/M (1.27 M/S)	300 F/M (1.52 M/S)	350 F/M (1.78 M/S)	400 F/M (2.03 M/S)	450 F/M (1.13 M/S)	500 F/M (2.54 M/S)
1,000 (453 kg)	5 HP	5 HP	7.5 HP	10 HP	10 HP	12.5 HP	15 HP	20 HP	20 HP	25 HP
1,500 (680 kg)	5 HP	7.5 HP	10 HP	12.5 HP	12.5 HP	15 HP	20 HP	25 HP	25 HP	30 HP
2,000 (907 kg)	7.5 HP	7.5 HP	10 HP	15 HP	20 HP	20 HP	25 HP	30 HP	30 HP	35 HP
2,500 (1,133 kg)	7.5 HP	10 HP	12.5 HP	20 HP	20 HP	25 HP	30 HP	GT31	GT31	GT31
3,000 (1,360 kg)	10 HP	12.5 HP	15 HP	20 HP	GT31	GT31	GT31	GT31	GT31	GT31

HORSEPOWER SELECTION CHART / 2:1 ROPING, COUNTERWEIGHT 40% CAPACITY

CAR CAPACITY	SUGGESTED HORSEPOWER AT SPEEDS OF:					
	50 F/M (0.51 M/S)	100 F/M (0.51 M/S)	125 F/M (0.64 M/S)	150 F/M (0.76 M/S)	200 F/M (1.02 M/S)	250 F/M (1.27 M/S)
1,000 (453 kg)	5 HP	7.5 HP	5 HP	12.5 HP	7.5 HP	20 HP
1,500 (680 kg)	5 HP	7.5 HP	7.5 HP	12.5 HP	10 HP	20 HP
2,000 (907 kg)	5 HP	7.5 HP	7.5 HP	12.5 HP	12.5 HP	20 HP
2,500 (1,133 kg)	5 HP	10 HP	10 HP	12.5 HP	15 HP	20 HP
3,000 (1,361 kg)	5 HP	10 HP	10 HP	15 HP	20 HP	25 HP
3,500 (1,588 kg)	7.5 HP	12.5 HP	12.5 HP	15 HP	20 HP	25 HP
4,000 (1,814 kg)	7.5 HP	12.5 HP	15 HP	20 HP	25 HP	30 HP
4,500 (2,041 kg)	7.5 HP	15 HP	15 HP	20 HP	GT31	GT31
5,000 (2,269 kg)	7.5 HP	15 HP	20 HP	20 HP	GT31	GT31
5,500 (2,500 kg)	10 HP	20 HP	GT31	GT31	GT31	GT31
6,000 (2,722 kg)	10 HP	20 HP	GT31	GT31	GT31	GT31

Horsepower selection chart assumes 30-in sheave configuration.
Horsepower required may be lower with smaller sheave diameter options.



2603 N 24th Street
P.O. Box 4025
Quincy, IL 62305
Ph: 217.222.0466
Fax: 217.222.0493

info@hollisterwhitney.com
www.hollisterwhitney.com
sales@vantageelevation.com
www.vantageelevation.com



Chicago 877.300.5830
New York 347.226.4555
Miami 877.241.9354
L.A. 877.300.5816
Toronto 888.425.2262
Dallas 305.389.3884