



Phone: (916) 426-2347
Email: renowtraction@vantageelevation.com

Job Name: _____ Job Number: _____

Date Received: _____

Instructions:

1. Please fill out these data forms as completely as possible. Incomplete data may delay delivery.
2. A blank or no selection will be considered as item not applicable to this project.
3. All applicable data should be measured on the existing equipment, when it is to be retained.
4. The bottom landing shall be referred to as landing 1, and shall be the reference landing without regard to the building floor labels.
5. Required fields will be displayed in **BOLD/RED**. Conditionally required fields will be displayed in *ITALICS/BLUE*

NOTE: Your controller will be built according to the data furnished herein.

Quote #: _____ P.O. #: _____ Customer #: _____

Job Name: _____

 Job Location: _____
 Job Address: _____
 Job City: _____
 Job State: _____ Zip Code: _____

Yes No Job Specifications
 Yes No Specifications have been sent
 Consultant: _____
 Contact: _____
 Phone: _____ Fax: _____
 Email: _____

Contractor Information:
Company: _____
Contact Name: _____
Address: _____
City: _____
State: _____ **Zip Code:** _____
Phone: _____ **Fax:** _____
Email: _____

Installation Type: New Construction
 Modernization
 Duty Type: Passenger Service Freight
 Building Classification:
 Office Hotel, Apartment, Condo
 Government Hospital/Medical Facility
 School or University Prison/Jail
 Other: _____

Shipping Information:
Company: _____
Contact Name: _____
Shipping Address: _____
City: _____ **State:** _____ **Zip Code:** _____
Phone: _____ **Fax:** _____
Email: _____

Code Compliance United States:
A17.1-20xx/B-44-20xx
 -22 -19 -16 -13
 -10 -07 -04 Other
 Explain (other) _____
 Additional state or local code compliance:
 Chicago Nebraska
 GSA/Federal New York City
 Michigan Washington (Seattle)
 Other _____

Notice Required:
 24 Hours 48 Hours Other: _____
 Shipping Method: Ground Air
 Lift gate truck required

Additional Compliance Requirements? Explain

~~Motor(s) ship to address (if supplied by EC):
 Motor Reference #: _____
 Same as above shipping information
 Contact Name: _____
 Shipping Address: _____
 City: _____ State: _____ Zip Code: _____
 Phone: _____ Fax: _____
 Email: _____~~

Delivery Schedule	
Controller	On-Site Date
Car	_____
Car	_____
Car	_____
Car	_____
Group	_____
Cross Registration Panel	_____

Data Forms Completed By:
 Name/Title: _____
 Phone: _____ Fax: _____
 Mobile: _____
 Email: _____
 Company: _____
 Signature: _____



AC Controller Data Forms

Pixel Master Data Forms.xls Revised 5/21/2026 Page 2 of 9
 Job Name: _____ Job Number: _____

Instructions:

1. Place an "X" in the appropriate box to indicate a floor opening. (F=Front & R=Rear)
2. To ensure the proper Landa stainless steel coded tape length, indicate all floor heights (including overhead and pit).
3. Provide an additional hoistway data page for each elevator that has different floor heights or openings.

Elevator ID:			Car A		Car B		Car C		Car D		Car E		Car F		Car Call Lockout		Hall Call Lockout		CODE BLUE		I.R./ Swing		Lobby/ Recall			
Building Elevator ID:																										
LDG #	Floor Label	Floor Height	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R	F	R
	Overhead																									
32																										
31																										
30																										
29																										
28																										
27																										
26																										
25																										
24																										
23																										
22																										
21																										
20																										
19																										
18																										
17																										
16																										
15																										
14																										
13																										
12																										
11																										
10																										
9																										
8																										
7																										
6																										
5																										
4																										
3																										
2																										
1																										
	Pit																									
Capacity: <input type="checkbox"/> lbs <input type="checkbox"/> kg																										
Speed: <input type="checkbox"/> fpm <input type="checkbox"/> m/s																										
Total Travel <input type="checkbox"/> ft <input type="checkbox"/> m																										
Traveler* <input type="checkbox"/> ft <input type="checkbox"/> m																										
															Number of Hoistways: <input type="text"/> (std 1)											
															Hoistway NEMA Rating: <input type="text"/> (std 1)											
															Final Limit Switches by EC** <input type="text"/> qty.											
															<input type="checkbox"/> Kellems Grips (total qty): <input type="text"/>											



Each Pixel control system includes Landa, a non-contact encoded car positioning system that features an encoded stainless steel tape and requires no magnets or terminal slow down switches to be installed.

*Specify travel cable length if ordering **Pixel custom travel cable (optional)**. Specify length needed per car.

**Mechanical (LS1) final limit switches come with standard 15lbs rail brackets and hardware.



Control Features



AC Controller Data Forms

Pixel Master Data Forms.xls | Revised 5/21/2026 | Page 3 of 9
 Job Name: _____ Job Number: _____

Enclosure & Accessories:

- NEMA 1 (standard) NEMA 12 NEMA 4 4X
- Air conditioned enclosure
- Forced air ventilation (NEMA 1 only)
- Enclosure interior lighting
- GFCI Outlet in Controller Enclosure

Type of Operation:

- Simplex:
 - Selective Collective Single Auto Push Button
 - Down Collective Single Button Collective
- Group *Number of Cars:* _____

Communication Cable Lengths:

Allow for 3ft extra at each end for controller hookup

- Car 1 to 2:* _____ ft *Car 2 to 3:* _____ ft
- Car 3 to 4:* _____ ft *Car 4 to 5:* _____ ft
- Car 5 to 6:* _____ ft *Other:* _____

- Cross Registration Panel
Existing Controller Prints Required
- Swing Car Operation: *Car(s):* _____
 - Key switch in car Key switch in hall
 - Automatically switch when IR call is registered

Fire Service Operation:

- Fire Service: Yes (standard) No
 - Phase I Keyswitch:* 3 position 2 position
 - Phase II Keyswitch:* 3 position 2 position
 - Main Recall Floor Landing #:* _____
 - Doors will open at:* Front Rear
 - Alt. Recall Landing #:* _____
 - Doors will open at:* Front Rear
- Additional Fire Recall Switch:
Location Landing #: _____

Inspection/Hoistway Access:

- In-Car Inspection Operation
Requires Enable, Up, & Down Buttons in-car
- Hoistway Access Operation
 - Top access switch (top landing):
Location: Front Rear
 - Bottom access switch (bottom landing):
Location: Front Rear
 - Only Top/Bottom Access Available*
 - Up-Down Access Switches in:* Hall Station Door Jamb
Other _____
 - 2-position Access Enable Switch
 - 2-position In-Car Inspection Switch
 - 3-position Inspection and HW Access switch

Note - Non-NEMA1 Car Top Inspection Stations supplied by customer

Additional Hoistway Accessories

- Independent Service Switch: Car (std.) Hall
- Attendant Operation Annunciator panel in car
- Sabbath Operation
- Car to Lobby Switch: Car Hall Other _____
- Cancel car calls immediately Answer new car calls
- Park with doors: Open Closed
- Return Landing #:* _____
- Parking: Single Car All Cars *Return Landing #:* _____
- Park with doors: Open Closed
- Pit Flood Operation
Return Landing #: _____ *Top Limit Landing #:* _____
- Fan & Light Timer Operation (Elevator Cab)
- Earthquake Operation:
 - Car Runs at Reduced Speed During Earthquake*
*Requires Hoistway Scan Switch & Indicators for ASME A17.1 2016+
 - Seismic switch Counterweight derailment device
- Emergency Power Generator
E.P. contact during normal op. Open Closed
 - Power pre-transfer contact
 - Sequential lowering (standard)
 - Simultaneous Lowering
 - Number of cars to run simultaneously: _____
 - Manual select switch:
of Positions: _____ *Labels:* _____
- Automatic Battery Powered Rescue (R&R)
- Hospital Service (Code Blue): (*indicate landings served on page 2*)
of cars allowed to run on hospital service: _____
Hospital Service Phase 2 Operation initiated by:
 - Hospital phase 2 switch Independent service switch
 - Other (explain): _____
- EMT/Emergency Medical Technician Service (Mass Only):
Return Landing #: _____
- Patient Security (Code Pink)
Patient Security Landing #'s: _____
5 Landings Maximum
- Load Weighing: By EC Mfg: _____
 - Rope Tension: *Rope Size* _____ *Rope Qty.* _____
 - Hall call bypass Anti- nuisance Overload
- Security:**
 - Call lockout: (*indicate landings served on page 2*)
 - Car: Card Reader Key Other: _____
 - Hall: Card Reader Key Other: _____
 - Car call security via car call button code entry
 - Car Call lockout override switch: Car (std) Hall
 - Hall Call lockout override switch: Car Hall (std)
 - Bypass Security When On:
 - Independent Service Attendant Service



Indicators



AC Controller Data Forms

Pixel Master Data Forms.xls Revised 5/21/2026 Page 4 of 9
 Job Name: _____ Job Number: _____

The Pixel control system requires all fixtures to be 24VDC, 3-6 watts maximum.

Car Call Registration:

Pixel Standard - CAN communication to COP

of car stations per car: _____

Stop Switch in Aux COP

Hall Call Registration:

Pixel Standard - CAN communication to HALL

Hall Calls through CAN Communication

Hall Calls through discrete I/O

Number of hall call risers: Front: _____ Rear: _____

If more than 2 hall call risers, please explain on page 7

Car PI:

- | | |
|---|--|
| <input type="checkbox"/> C.E. Micro Comm 3-wire | <input type="checkbox"/> E-Motive 3-wire |
| <input type="checkbox"/> ECC DL-20/EX-51 | <input type="checkbox"/> E-Motive - CAN |
| <input type="checkbox"/> MAD - CAN | <input type="checkbox"/> VEGA - CAN |
| <input type="checkbox"/> 4.3" Giotto | <input type="checkbox"/> 7" Giotto |
| <input type="checkbox"/> 7" Matisse | <input type="checkbox"/> 10" Matisse |
| <input type="checkbox"/> 2.8" Raffaello | <input type="checkbox"/> 4.3" Raffaello |
| <input type="checkbox"/> Other: _____ | <input type="checkbox"/> Line Per Floor |

Hall PI:

- | | |
|---|--|
| <input type="checkbox"/> All Floors | <input type="checkbox"/> Lobby Only |
| <input type="checkbox"/> C.E. Micro Comm 3-wire | <input type="checkbox"/> E-Motive 3-wire |
| <input type="checkbox"/> ECC DL-20/EX-51 | <input type="checkbox"/> E-Motive - CAN |
| <input type="checkbox"/> MAD - CAN | <input type="checkbox"/> VEGA - CAN |
| <input type="checkbox"/> 4.3" Giotto | <input type="checkbox"/> 7" Giotto |
| <input type="checkbox"/> 2.8" Raffaello | <input type="checkbox"/> 4.3" Raffaello |
| <input type="checkbox"/> Other: _____ | <input type="checkbox"/> Line Per Floor |

Car Lanterns & Audible Indicators:

- Car lanterns: Chime Gong
- EC 3-wire C.E. Micro Comm EC 3-wire Emotive
- Discrete via Pixel COP (24VDC,6W max.)
- Passing floor enable button ("S" button)
- Voice annunciation device
CE Micro Comm, Emotive 3-wire or CAN driven only

Hall Lanterns:

- Hall lanterns: Chime Gong
- EC 3-wire C.E. Micro Comm EC 3-wire Emotive
- Discrete via Pixel Hall System (24VDC,6W max.)
- CAN Communication via P-HALL boards (1 per floor)
- Location(s): All Floors Lobby Only
- Other: _____

Miscellaneous Fixtures (24VDC, 3W max.):

<input type="checkbox"/> Indicator description:
<input type="checkbox"/> Emergency power light (Hall)
<input type="checkbox"/> Emergency power panel lights
<input type="checkbox"/> Fire service light (COP & Hall)
<input type="checkbox"/> Heavy load light (Hall)
<input type="checkbox"/> Hospital service light (COP)
<input type="checkbox"/> Hospital service buzzer (COP)
<input type="checkbox"/> In-use Lights (Freight Only)
<input type="checkbox"/> Overload light / buzzer (COP)
<input type="checkbox"/> Duplicate Emergency Stop Bell at Lobby
<input type="checkbox"/> Lobby control panel (provide fixture prints/details)
<input type="checkbox"/> Fire control panel (provide fixture prints/details)

CAN Serial Hall Call/Lantern RJ45 Connection Options

NOTE: The standard cable package will be provided if no alternate selection is made.

Standard Cable Package

- Controller-to-first node: Length: 25 ft
- Floor-to-floor: One per floor, Length 14 ft, **or**
- Floor-to-floor: Two per floor, Length 7 ft (if hall lanterns)
- Splitter-to node: One per node, Length 5 ft
- Splitter-to-node (one per Access Switch): Length 7 ft
- Fire Switch Node to Hall Call Node (one): Length 6 inches
- Splitters (enough for standard node network)

Alternate lengths needed (indicate quantity and lengths)

Controller-to-first node: Length: _____

Floor-to-floor: Qty: _____ Lengths: _____

Splitter-to-hall node: Qty: _____ Lengths: _____

Splitter-to-access nodes: Qty: _____ Lengths: _____

Fire Switch Node to Hall Call Node: Length: _____

Delivery of Fixture Node Boards (Pre-wiring)

- Ship Fixture Node Boards with Controller
- Ship Fixture Node Boards in advance to:

Company: _____

Contact Name: _____

Phone #: _____ Ref #: _____

Email: _____

Address: _____

City: _____ State: _____ Zip: _____

Top of Car to COP Wiring Harness

- 15' Harness (standard) 25' Harness

Additional Comments: _____

New door operator:
 Supplier: _____
 Contact: _____
 P.O.#: _____ Phone: _____
 Existing door operator

Car Gate and Hoistway Doors:

Automatic car gate
 Manual car gate
 Gate release solenoid: Voltage: _____ V Phase: _____
 Current: _____ A Description: _____

Electric Door Restrictor
 Brand: _____ Model: _____

Automatic Passenger Door Operators:

Place an "X" in the appropriate box(es) to indicate door operator (F = Front and R = Rear).

F	R		230V	115V
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFR:	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFE:	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOVFE CAN bus:	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOD (shunt wound):	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	GAL MODPM:	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	GAL MOM / MOH		
<input type="checkbox"/>	<input type="checkbox"/>	MAC PM-SSC		
<input type="checkbox"/>	<input type="checkbox"/>	ECI: <input type="checkbox"/> 895 <input type="checkbox"/> 1000 <input type="checkbox"/> 2000 <input type="checkbox"/> VFE2500		
<input type="checkbox"/>	<input type="checkbox"/>	Atlantic Tech <input type="checkbox"/> 9001 <input type="checkbox"/> 9003		
<input type="checkbox"/>	<input type="checkbox"/>	Torin/Standard FX1C		
<input type="checkbox"/>	<input type="checkbox"/>	Dover/TKE: <input type="checkbox"/> HD73 <input type="checkbox"/> HD85 <input type="checkbox"/> DC68		
<input type="checkbox"/>	<input type="checkbox"/>	Dover/TKE: <input type="checkbox"/> LD16 <input type="checkbox"/> HDLM <input type="checkbox"/> PA LULA		
<input type="checkbox"/>	<input type="checkbox"/>	Fermator VVVF5		
<input type="checkbox"/>	<input type="checkbox"/>	IPC <input type="checkbox"/> Encore <input type="checkbox"/> D2000 <input type="checkbox"/> D3000		
<input type="checkbox"/>	<input type="checkbox"/>	KONE AMD* / ReNova*		
<input type="checkbox"/>	<input type="checkbox"/>	Wittur MidiSupra* 230V Std. 115V		
<input type="checkbox"/>	<input type="checkbox"/>	Nova BG101		
<input type="checkbox"/>	<input type="checkbox"/>	Otis AT400 <input type="checkbox"/> Customer-supplied Pwr Supply		
<input type="checkbox"/>	<input type="checkbox"/>	Otis 6970A (Reactance)		
<input type="checkbox"/>	<input type="checkbox"/>	R&R <input type="checkbox"/> DC244 <input type="checkbox"/> DC2000		
<input type="checkbox"/>	<input type="checkbox"/>	Schindler QKS: <input type="checkbox"/> 14 <input type="checkbox"/> 15		
<input type="checkbox"/>	<input type="checkbox"/>	Other:*		

*Please send/provide door operator wiring diagrams.

Door Features:

Infrared detector/dual-beam photo eye unit:
 By EC (Weco-917P-2D) Customer Provided
 With GAL door operator (MOVFR, MOVFE)
 Cut-out switch located in COP
 Anti- nuisance

Mechanical safety edge
 Front heavy doors at landings: _____
 Rear heavy doors at landings: _____
 Door hold: Switch Button: (time) _____ sec.
 Nudging: Reduced torque with buzzer
 Buzzer only

Hoistway Door Type:

Automatic passenger (horizontal sliding)
 Automatic freight (vertical sliding)
 Manual*
 *Interlocks:
 Door closed contacts (separate from locked contacts)
 Door locked contacts
 Brand: _____ Model: _____

Door locking cam:
 Fixed
 Mechanical (driven by automatic car gate)
 Retiring: Voltage: _____ V DC AC
 Current: _____ A Phase: _____

Notes: _____

Power Freight Doors:
 (Non-Courion/Peelle Freight Door Operator wiring diagrams must be sent to EC)

Courion: MP iLearn
 Peelle: PLC Wireless
 EMS (provide prints)
 Other (provide prints): _____

Freight Door Operation:

Door Opening: Automatic Momentary pressure
 Constant pressure

Door Closing: Automatic Momentary pressure
 Constant pressure

Fire Ph. 1 Closing: Automatic Momentary pressure
 Constant pressure

For Courion iLearn Only:
iLearn Module to be Shipped to EC By Customer?
 Yes No

Notes: _____

GLR-25S2 RAIL-MOUNTED MACHINES (Up to 2500 lbs.)

FILL IN ALL ITEMS ASSOCIATED WITH THE APPLICATION

MACHINE ROOM-LESS APPLICATION - GENERAL INFORMATION

EMPTY CAR WEIGHT: _____


TRACTION SHEAVE DIAMETER 480mm (18.90"): 420mm (16.53"):

HOIST ROPES: QUANTITY: SIZE: NOTE: MAX # OF ROPES IS 8 - 8 mm (11 mm PITCH) OR 6 - 10 mm (13.75 mm PITCH)

IS MANUAL BRAKE RELEASE CABLE REQUIRED? YES NO

IF SO, SPECIFY LENGTH (STANDARD IS 4M [13' - 1"]):

ENCODER CABLE LENGTH (STANDARD IS 20 METER [65'-7"]):

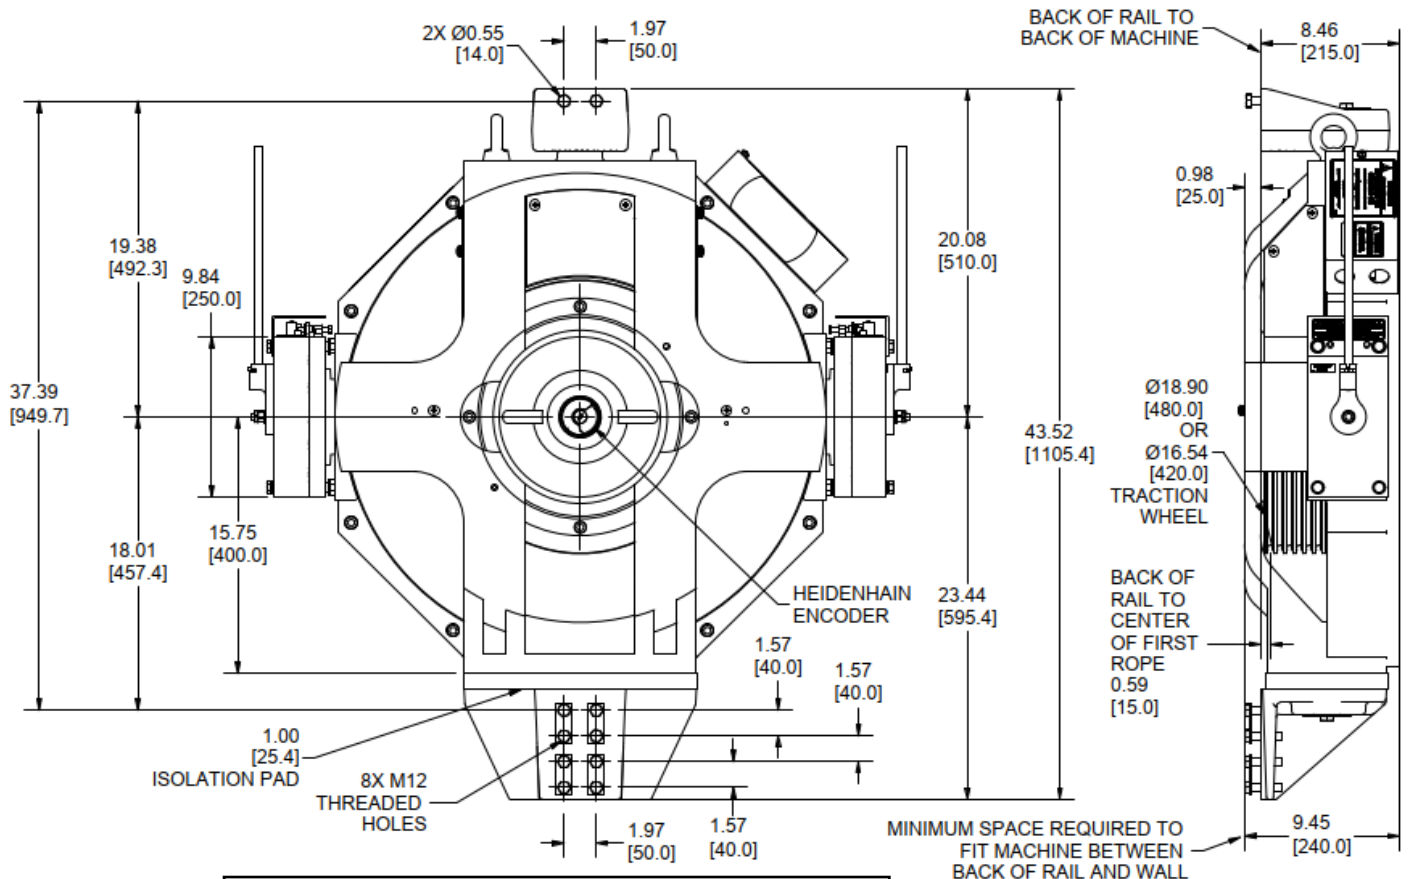

MACHINE ONLY WEIGHT: 1,056 LBS.
MACHINE WITH MOUNTING BRACKETS: 1,130 LBS.

Submission of this form constitutes that all physical dimensions match or can be accommodated based on the existing site conditions.

GLR-35S2 RAIL-MOUNTED MACHINES (Up to 3500 lbs.)

FILL IN ALL ITEMS ASSOCIATED WITH THE APPLICATION

MACHINE ROOM-LESS APPLICATION - GENERAL INFORMATION


EMPTY CAR WEIGHT: _____

HOIST ROPES: QUANTITY: _____ SIZE: _____ NOTE: MAX # OF ROPES IS 8 - 8 mm (11 mm PITCH) OR 6 - 10 mm (13.75 mm PITCH)

IS MANUAL BRAKE RELEASE CABLE REQUIRED? YES NO

IF SO, SPECIFY LENGTH (STANDARD IS 4M [13' - 1"]): _____

ENCODER CABLE LENGTH (STANDARD IS 20 METER [65'-7"]): _____

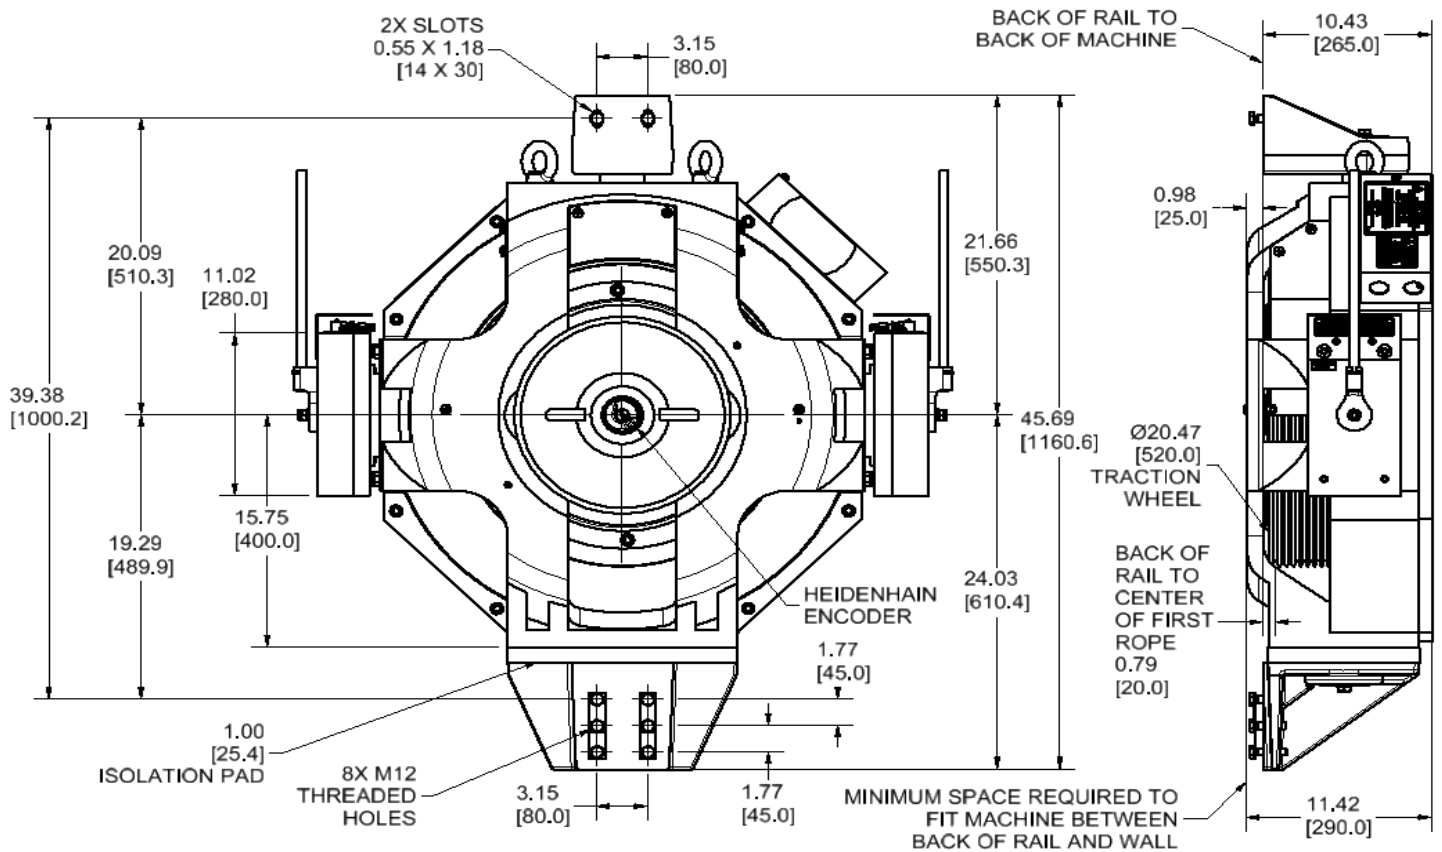

MACHINE ONLY WEIGHT: 1,400 LBS.
MACHINE WITH MOUNTING BRACKETS: 1,500 LBS.

Submission of this form constitutes that all physical dimensions match or can be accommodated based on the existing site conditions.

Line Voltage: _____ (measured)
 AC 3 phase (symmetrical with respect to ground)
 AC single phase
 60 Hz 50 Hz
 Brown Out Circuit
 Surge Suppressor

Machine: Existing New
 Brand: _____
 Location: Overhead Basement MRL
Roping: 1:1 2:1 Underslung
 Ropes are 8mm (0.315") diameter or smaller

Main Brake:
 DC AC single phase AC 3-phase
 Number of brake coils: 1 2 Other _____
 Per coil voltage and resistance measurements:
Voltage Picking: _____ **Voltage Holding:** _____
Resistance: _____ ohms Measured Data
 If measured: Hot Cold
 Contact on Brake: N/O (closed = brake is picked)
 N/C (open = brake is picked)

Emergency Brake (required on A17.1-2000 and later):
 Rope brake: Model: _____
 Hollister Whitney Standard Linear
 Draka RB500
 Independent brake on machine # of coils: _____
Voltage picking: _____ **Voltage Holding:** _____
Resistance: _____ Ohms
 Not Required

Additional Requirements:
 Isolation Xfrmr By Customer **KVA (if not by EC):** _____
 Opt. fuse kit (Iso Xfrmr secondary overcurrent protection)
 Line reactor
 Harmonic Filter
 Motor choke or output filter
 AC Regenerative Drive
 EMI / RFI Filter
 Governor with remote set & reset solenoids:
 Voltage: _____ AC DC **FLA:** _____
 Jawless governor (rope slack switch)
 Reduced stroke buffers: **Buffer rating:** _____ fpm
 Counterweight safety

~~**Hoist Motor:** Existing New New from EC
 Motor brand: Reuland Magil (Reliance)
 Imperial TorinDrive
 Other: _____
 Motor mounting: Foot Flange
 Shaft style: Straight Tapered~~

Motor Data
Type: Induction (Geared) PM (Gearless)
HP: _____ **Voltage:** _____
Frequency: _____ Hz. **FLA:** _____ **NLA:** _____
 Peak Voltage: _____ Peak Amps: _____
Full Load RPM: _____ Synchronous RPM: _____
 Number of poles: _____ Model #: _____

VVVF Drive
 No Preference (first available - standard)
 Magnetek
 KEB

Velocity Encoder:
 Existing New New by EC
 Live motor shaft diameter: _____
 Brand: _____ Model: _____
Encoder Pulses: _____ PPR
 Encoder Cable provided by:
 Customer By EC Length: _____ m
 (if by EC)

Controller Location

Control Closet

Adjoining / Adjacent to Hoistway at uppermost landing
 Remote - Wire path footage from machine:

Control Room

Adjoining / Adjacent to Hoistway at uppermost landing
 Remote - Wire path footage from machine:


Emergency Brake Release w/ Video Monitor
 (Required where sight line from control to drive sheave is not visible)

Space Limitations - Explain: _____

Additional Information: _____

Using the grid layout below, identify each elevator by a number/name as appropriate for the building configuration. Place a 'X' through unused hoistways. Indicate location of the hall call pushbuttons, door openings and walls, as shown in the example below.

Example drawing of a 3 car group.

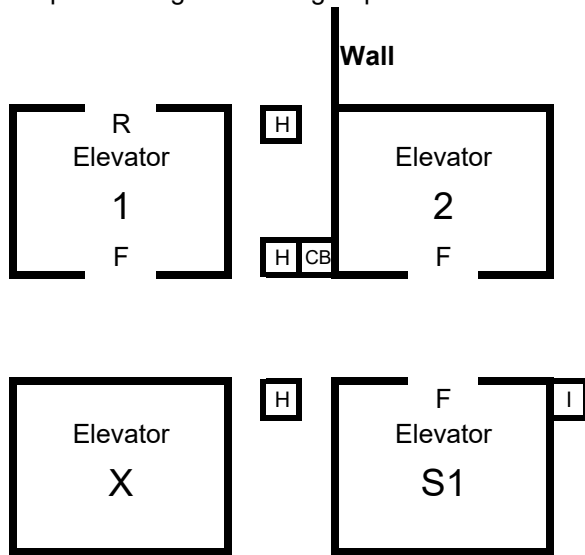


Door openings:
F = Front opening
R = Rear opening

Notes: _____

Hall Call Risers:

- H Hall call riser (group)
- I Inconspicuous riser (swing car riser)
- CB Code Blue (hospital service) riser

Notes: _____

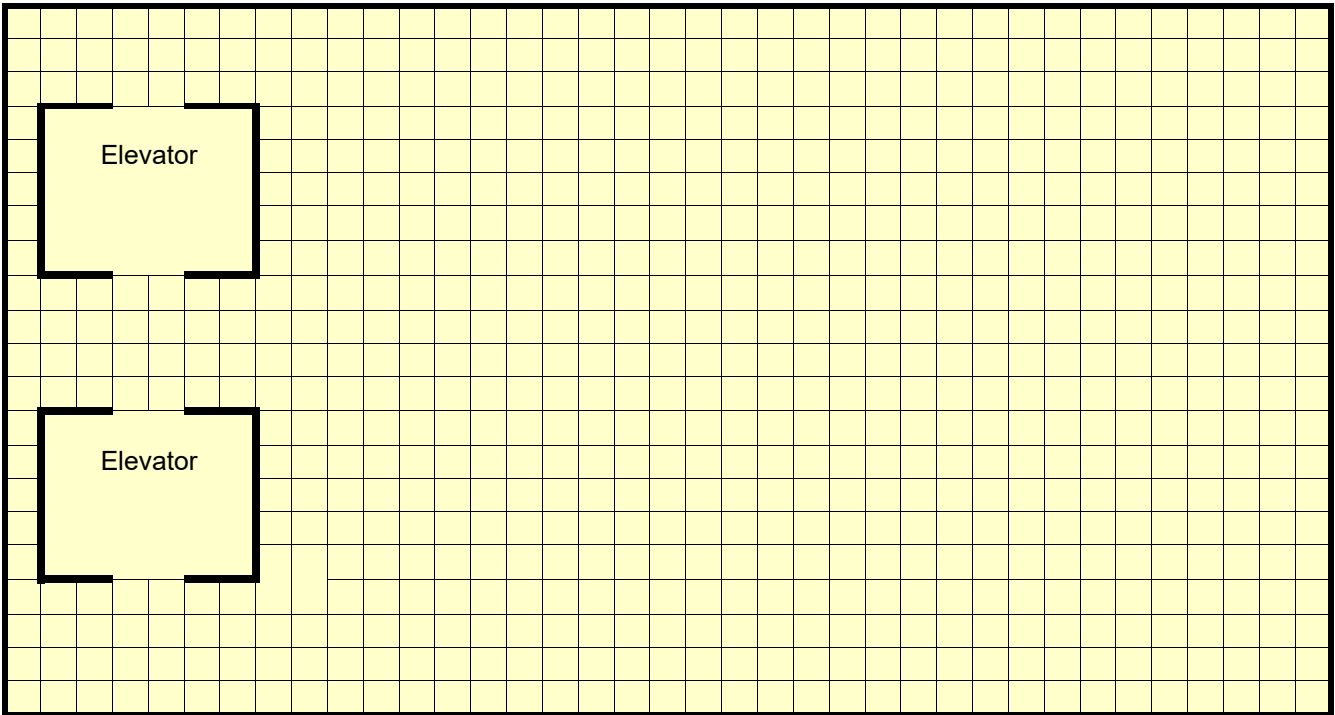

Special instructions: _____

